INSTALLATION INSTRUCTIONS

For Models 176-1-138

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to loose any small parts necessary for installation.
3. Attach the crossbar (B) to the outlet box using the two screws (C) from the outlet box. The side of the crossbar marked "GND" and with two mounting screws must face out.
4. Thread the two Mounting Screws (A) on crossbar about 1/4", align with the pre-drilled holes in the canopy (D).
5. Feed wire thru rods (F) as required to get desired height. While holding the center tube (F) turn counter-clockwise four full turns. Attach each additional center tube (F) by turning it clockwise until assembled.
6. While holding the canopy (D) toward the ceiling, connect the electrical wires as follows (See Figure 2). Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture wire to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided. Tuck the wire connections neatly into the ceiling junction box as you hold the canopy (D) assembly toward the ceiling.
7. Place the metal frame (H) and glass shade (J) over the socket (G).Then secure the glass with metal ring (J) and retaining ring (K).
8. Attach the canopy (D) onto outlet box and secure it with nuts (E).
9. Install the light bulbs in accordance with fixtures specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 2

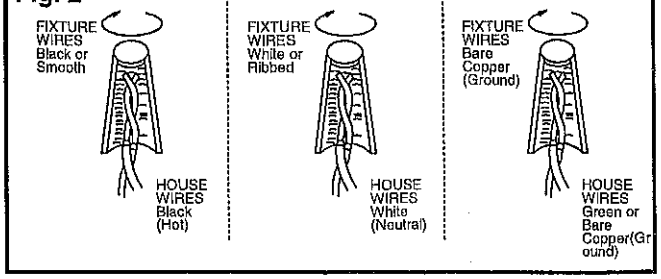
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green or Bare Copper(Ground)

Fig.1

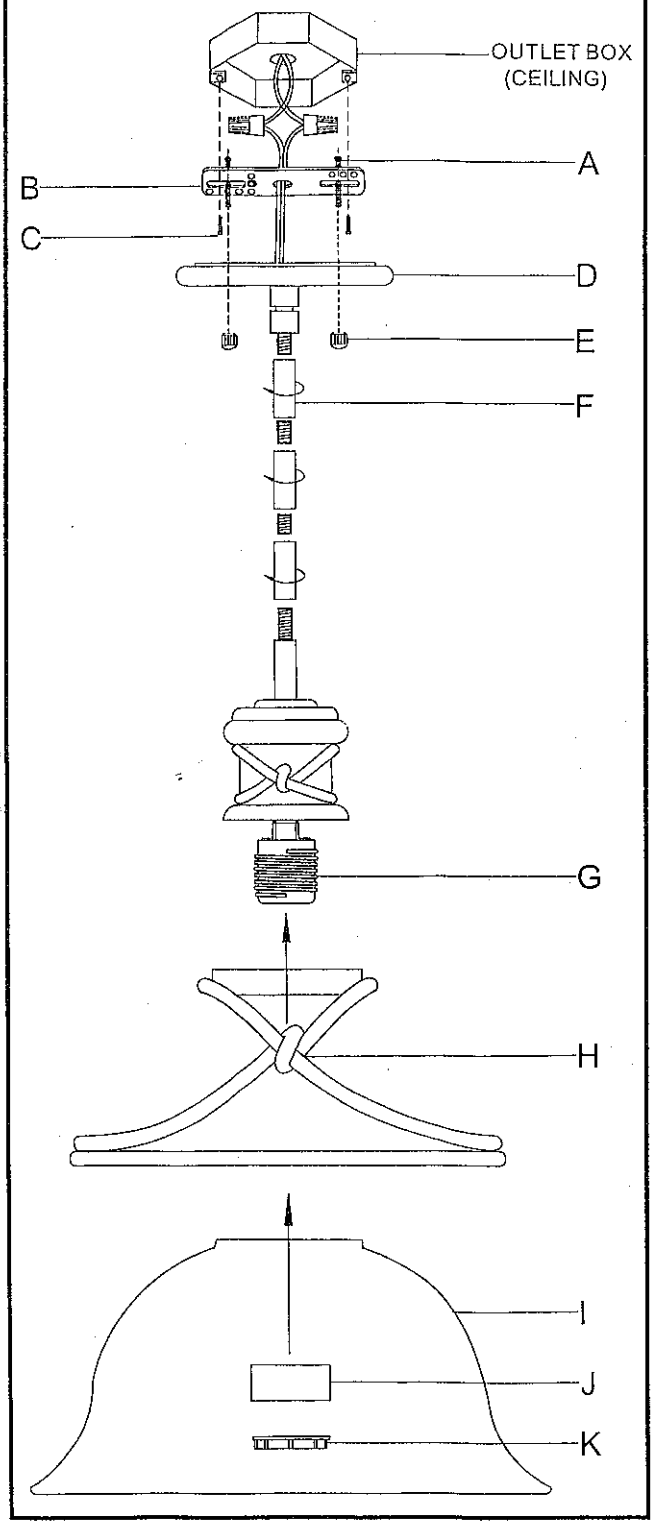

Listed

american lighting association